


Nutfräser




Nutfräser HW Z=2 Zylinderschaft 6mm mit HW Bohrschneide

M1020-6

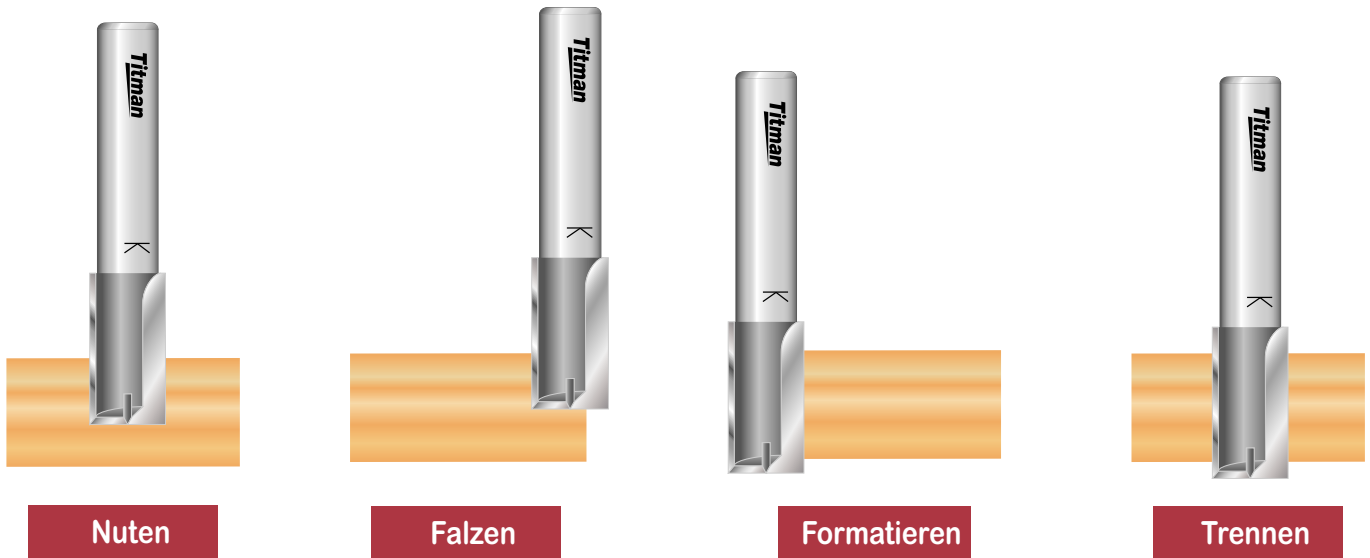

n. max
24.000

BG-TEST
145-002

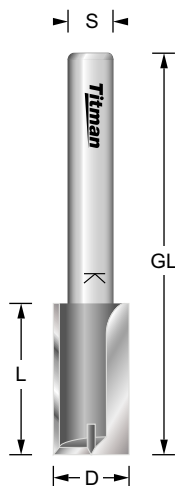

Bestell-Nr.	D mm	L mm	GL mm	S mm	EUR
M26.5-6	2	6.5	40	6	32,56
M310-6	3	10	46	6	31,63
M410-6	4	10	46	6	31,89
M516-6	5	16	59	6	32,56
M520-6	5	20	61	6	34,69
M616-6	6	16	52	6	32,56
M623-6	6	23	59	6	34,69
M716-6	7	16	48	6	34,02
M820-6	8	20	53	6	32,96
M820/70-6	8	20	70	6	43,85
M920-6	9	20	53	6	34,30
M1020-6	10	20	53	6	33,37
M1220-6	12	20	53	6	34,69
M1320-6	13	20	53	6	39,73
M1620-6	16	20	53	6	36,28
M1820-6	18	20	53	6	37,74
M2220-6	22	20	53	6	45,58

Nutfräser mit Bohrschneide zum Eintauchen.
Stirn- und umfangeschneidend.
Rechtslauf.

Dichtungsnutfräser siehe Seite 20.