

Zinkenfräser


Zinken und Gratfräser HW Z=2

DC22-8




n. max
24.000

BG-TEST
145-001

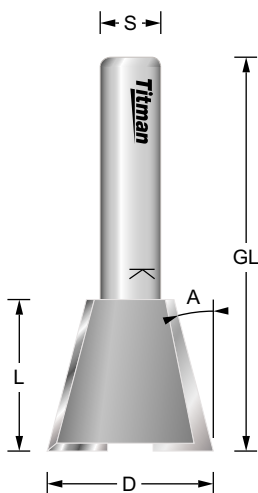

Bestell-Nr.	D mm	A	L mm	GL mm	S mm	EUR
DC10-8	10	10°	9	45	8	40,13
DC12-8	12	10°	10	46	8	41,73
DC13.5-8	13.5	13°	13.5	44	8	41,73
DC14-8	14	10°	12	49	8	41,73
DC16-8	16	10°	16	45	8	44,53
DC20-8	20	10°	16	52	8	50,25
DC20-10	20	10°	16	52	10	50,25
DC22-8	22	15°	20	52	8	56,22
DC26-12	26	15°	25	70	12	79,21

DC16-8

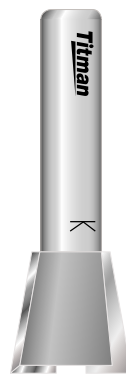

DC26-12



Zinkenfräser. Stirn- und umfangschneidend. Rechtslauf.


Schwalbenschwanzfräser VHW Z=2 für HOFFMANN

WDC2-6



n. max
24.000

BG-TEST
145-001

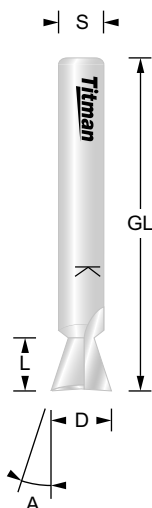

Bestell-Nr.	Größe	D mm	A	L mm	GL mm	S mm	EUR
WDC1-6	W1	5.5	18°	4	45	6	58,46
WDC2-6	W2	8	18°	6	45	6	63,68
WDC3-6	W3	9.5	18°	7.5	45	6	67,86

Vollhartmetall-Fräser für die HOFFMANN-Schwalbenschwanzverbindung.
Stirn- und umfangschneidend. Rechtslauf.